

蝶阀
Butterfly valve

K4

≥ ⚡ ELE 32 📏 PNE 33



永熙机电


- 附有嵌入式 PLS 锁扣手柄 -Praher 标签系统
- 10 个锁定位置选择
- 双密封阀轴
- 隔离介质接触部件
- 整体安装平台
- 可方便安装执行机构
- ISO5211 法兰标准 (F07,F10)

- Safety handle with PLS – Praher Labelling System
- Ten different locking positions
- Double sealed shaft
- Encapsulated wetted parts
- Integrated brackets for fix point mounting
- Simple upgrade to automatic actuation
- ISO 5211 flange type (F07, F10)


1 配齿轮箱手轮式样
Model with gear box



		密封	Seal s	尺寸	Dimensions	PN	连接方式	Co nnection s
材料 Models		PVC-U	EPDM, FPM	DN65/d75/2½"-DN200/d225/8"		10	法兰连接	flange (ANSI, DIN, JIS)
		PVC-C	EPDM, FPM	DN65/d75/2½"-DN100/d110/4"		10		
		PP	EPDM, FPM	DN65/d75/2½"-DN200/d225/8"		10		
		PVDF	EPDM, FPM	DN65/d75/2½"-DN200/d225/8"		10		

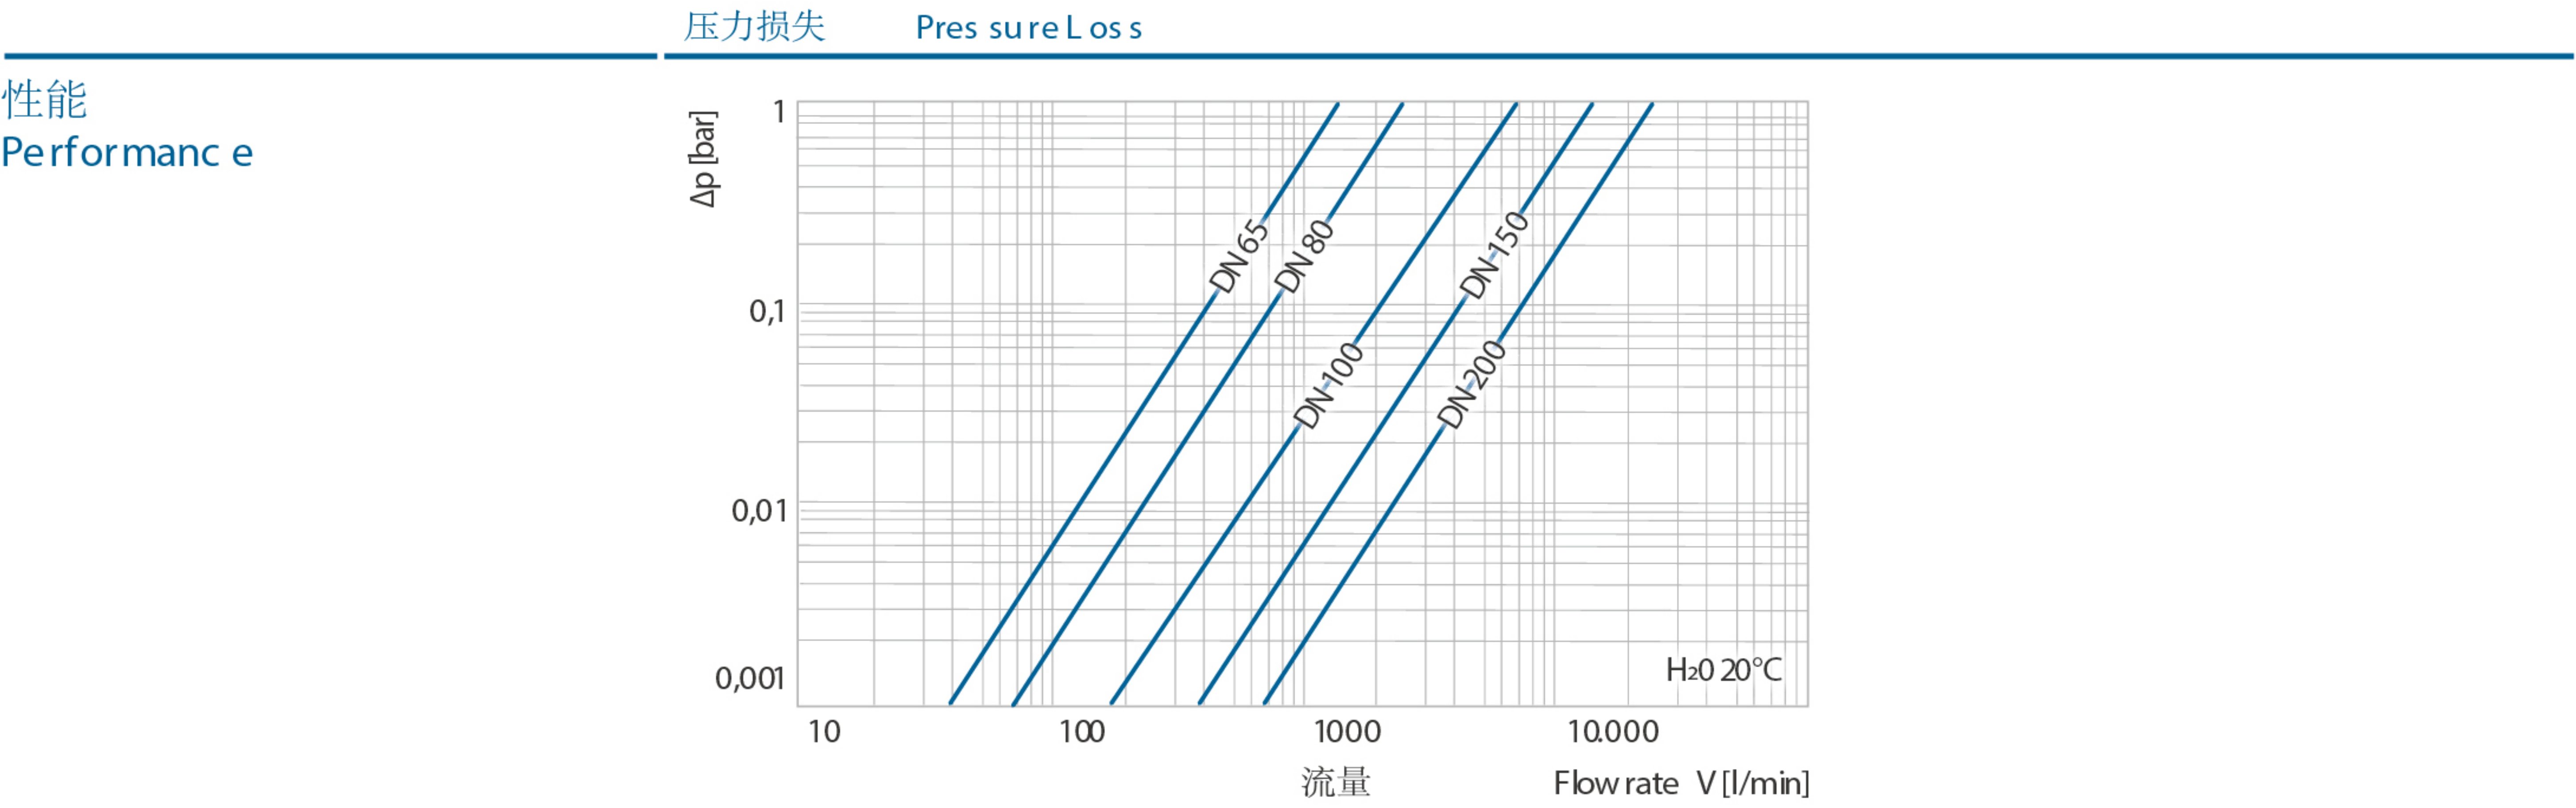

扭矩
To rque

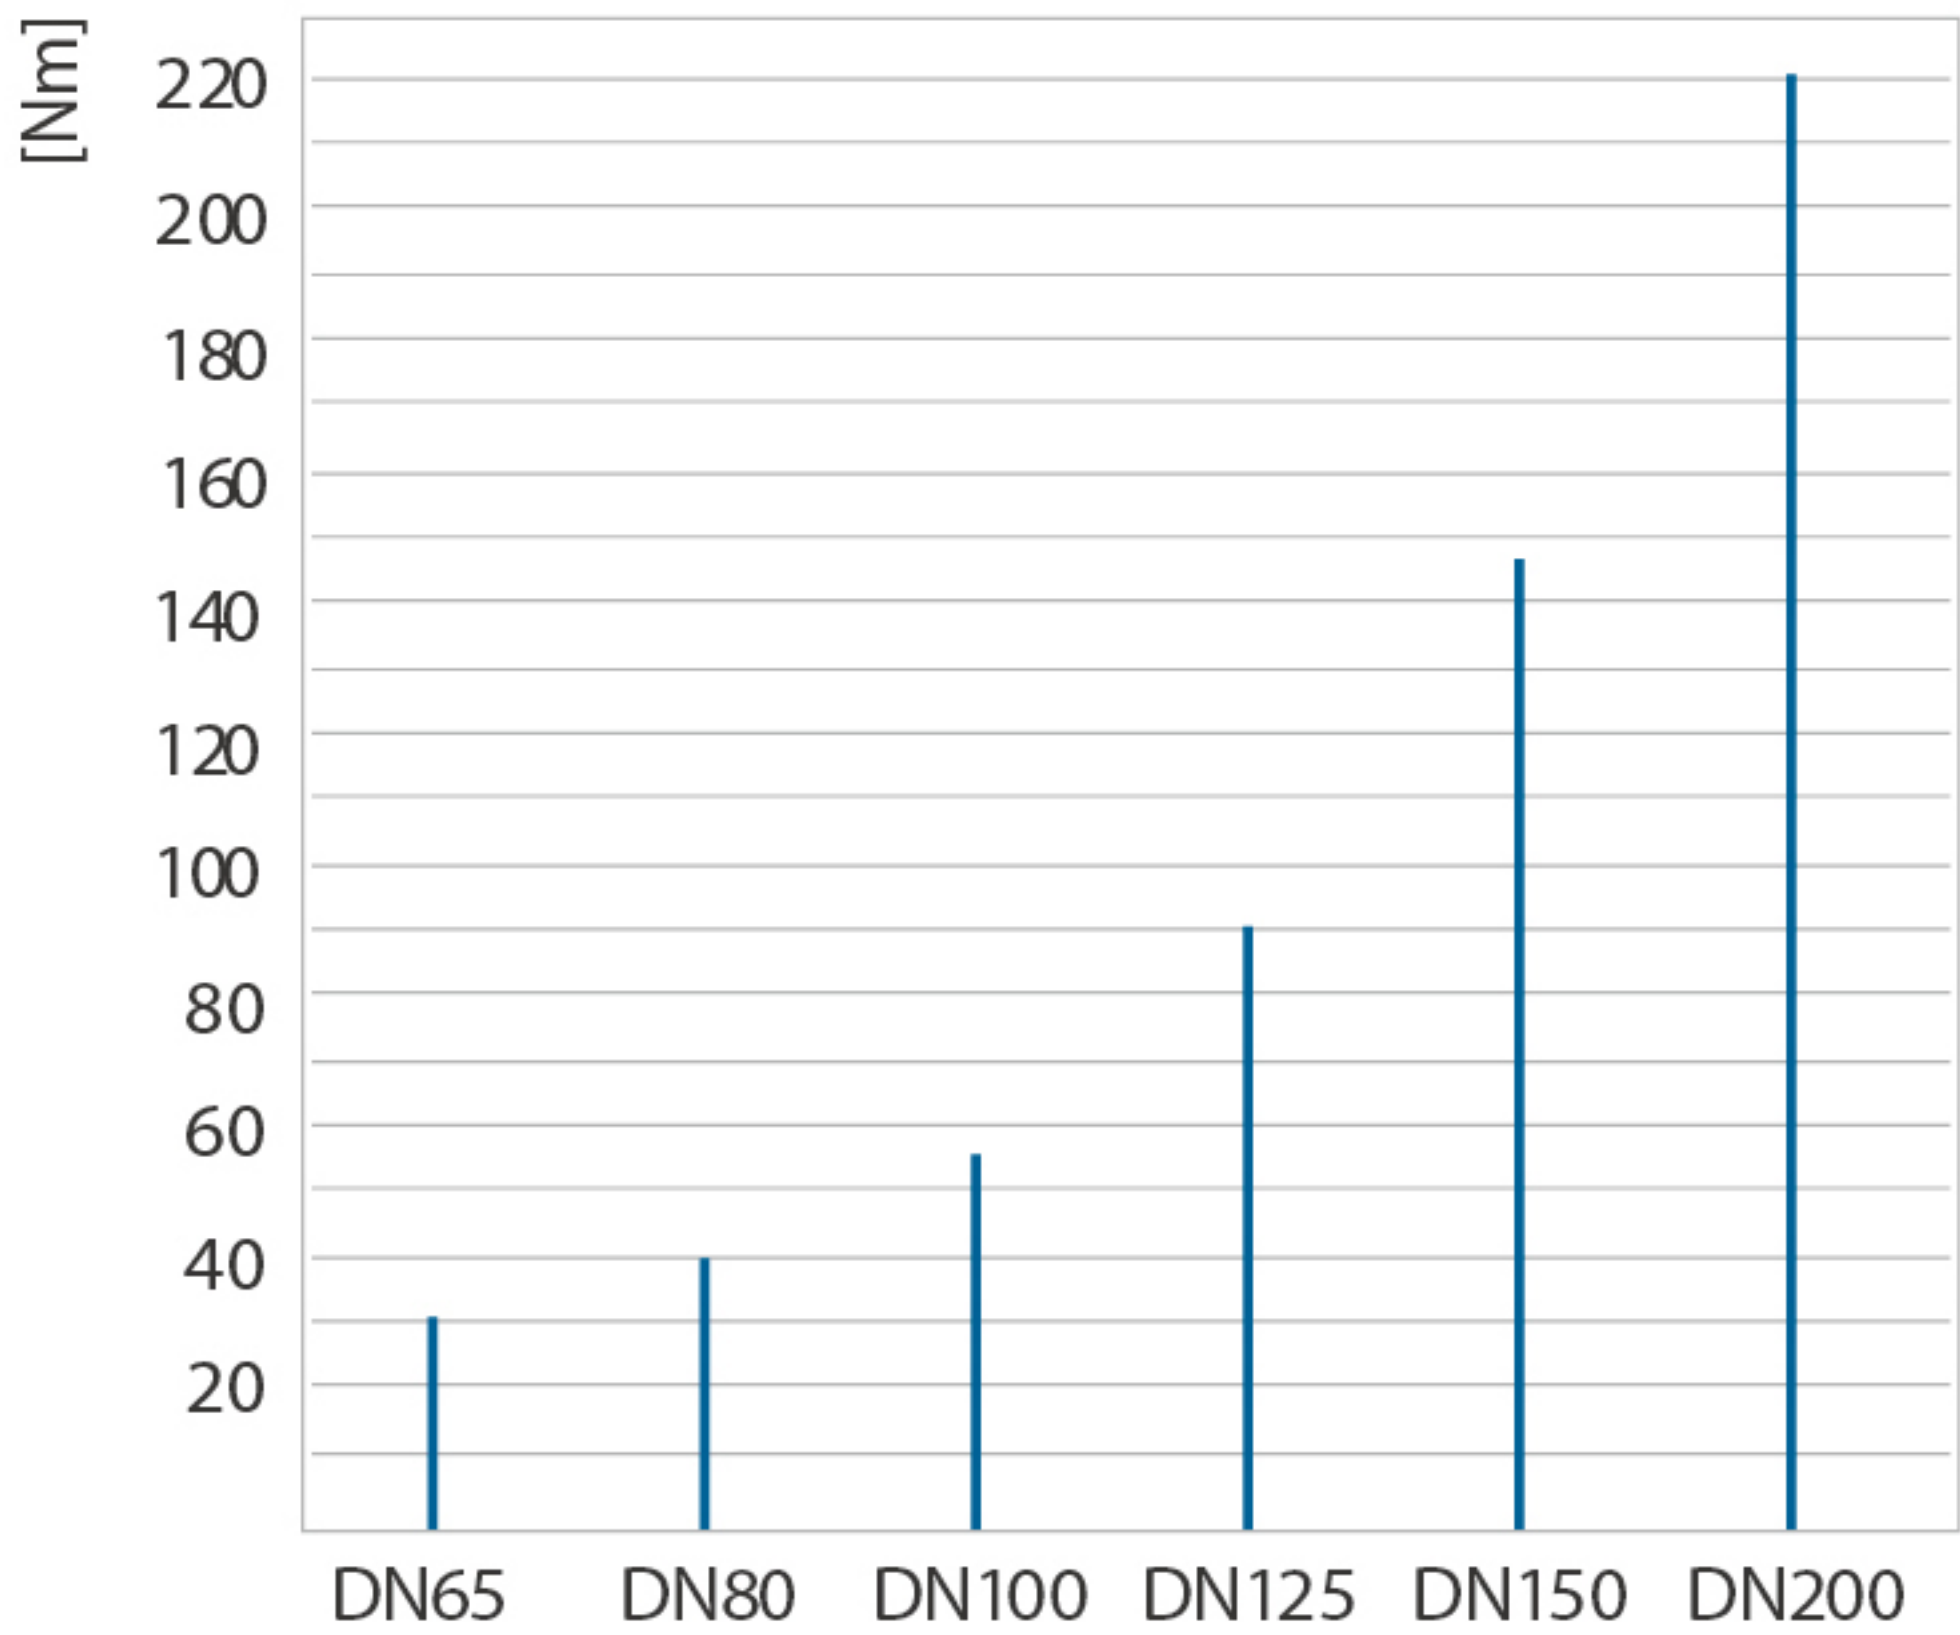

连接螺栓扭矩
Torques crew j oint

DN	65	80	100	125	150	200
Nm	15	18	20	30	40	55

	d	DN	G	W	J	K	D	C	Z	S	R	P	h	H	E	A	M
外型尺寸 Dimensions	75	65	2½"	90°	19	127-145	65	133	46	55	25	7	100	285	98	230	114
	90	80	3"	45°	19	146-160	80	176	49	70	30	9	100	292	116	230	114
	110	100	4"	45°	19	175-190,5	100	206	56	85	35	9	115	322	146	300	114
	140	125	5"	45°	23	209,5-216	125	234,5	64	100	45	9	130	358	170	300	114
	160	150	6"	45°	23	234,5-241,3	150	261	70	110	45	9	147,5	396	196	386	150
	225	200	8"	45°	23	290-298,5	200	314	71	145	40	9	175	458	251	386	150

